


Assembling of the PCI-Riser adapter-set f. M350 case and Intel D945GSEJT mainboard *new*

1. Before your start with the installation of the Riser Card, connect the plugs for the power SW, power LED and the front panel USB with the mainboard.







2. Attach the I/O panel, which is part of the delivery content, on the back of the case and screw it tight.

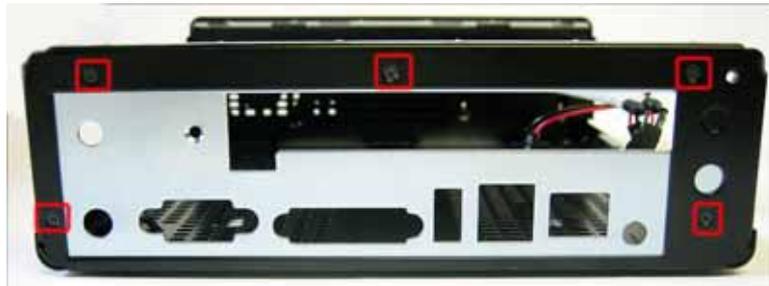

3. Now plug the PCI Riser card in to the PCI slot on the mainboard.

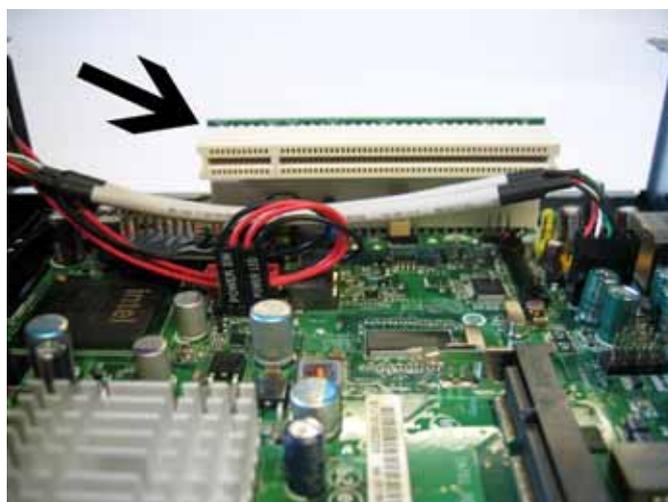

4. Plug the chosen PCI card in to the PCI slot of the Riser card and make sure that the nose attached to the PCI card is fastened at the dedicated spot of the I/O panel (on the left hand side as seen from inside).

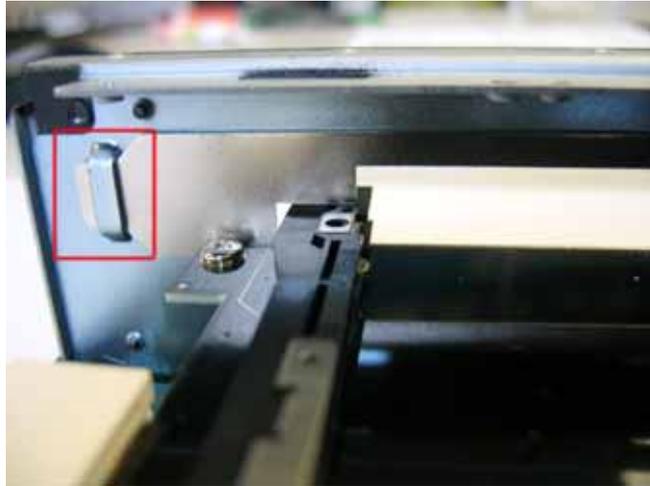

5. Next, please un-wrap the angle bracket (part of the delivery content). Attach the angle bracket in a way that the long side fits tight from the inside of the panel and the short side is covering the spots for the screws of the PCI card.



6. Screw the angle bracket from the outside on to the I/O panel.



7. Afterwards, connect (screw) the PCI card with the angle bracket.



8. Now place the HDD mounting in the designated mounting fixture and screw it to the case.



9. Last but not least, close the lid and the system including the Riser card is ready to go.